



LEVEL DIFFICULTY

SHAD


QJ MOTOR SQ 16 / SQ 200 '25

SHAD LOCKS Q0SQ15SC

SIZE


5

BCN

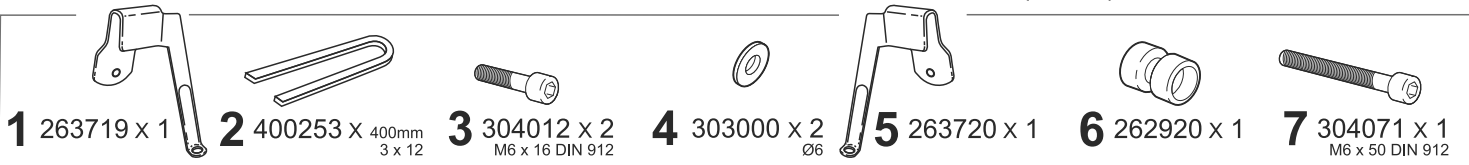

WARNING!

- | | | | | |
|---|---|--|---|--|
| <p>(GB) Tight firmly the pivot. Make sure that the pivot is firmly tight. LUBRICATE ONLY WITH WD-40 OIL! Check tightness every 4 months.</p> | <p>(E) Apretar el pivote fuertemente. Asegurarse de que el pivote queda totalmente fijado. LUBRICAR SOLO CON ACEITE WD-40! Reparar apriete cada 4 meses.</p> | <p>(D) Zapfen besonders fest anziehen und sicherstellen, dass er sich nicht mehr bewegen kann. ALS SCHMIERMITTEL IST NUR ÖL VOM TYP (WD 40) ZU VERWENDEN Alle 4 Monate Drehmoment überprüfen.</p> | <p>(I) Premere il perno con forza. Assicurarsi che il perno sia opletamente fissato. LUBRIFICARE SOLO CON OLIO WD-40! Controllare il serraggio delle viti ogni 4 mesi.</p> | <p>(F) Serrer fortement le pivot. S'assurer qu'il reste totalement fixé. AVEC WD-40! Vérifier le serrage des vis tous les 4 mois.</p> |
|---|---|--|---|--|

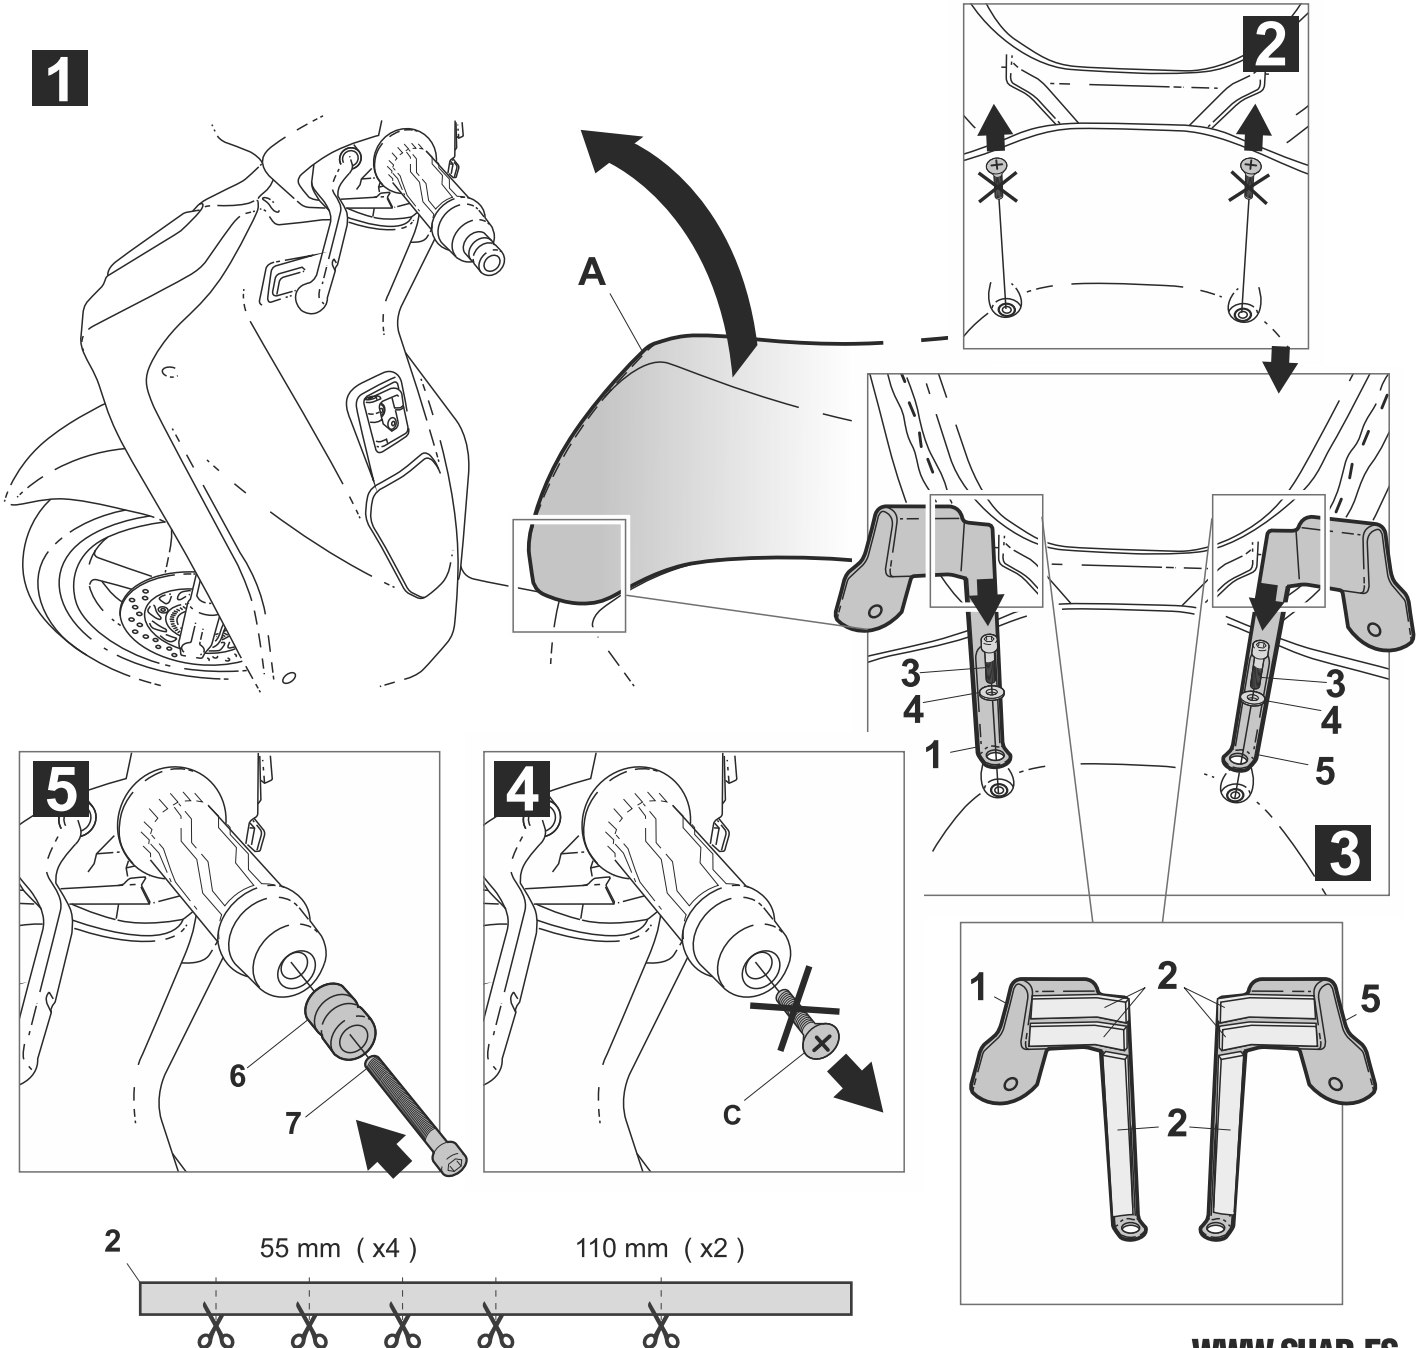

WWW.SHAD.ES

IMPORTANT: Based on European models. For compatibility with models in other continents, check www.shad.es

REF. 500479 Edition 2ª