


Cycles for bleeding with the Baldwin Bleeder manual vacuum pump

© Baldwin Concepts 2025 Patented NL1044697B1




A. PUSH - IN OIL (Always start with this when empty)


A.1 Lift Lever with button pushed, so oil can flow through

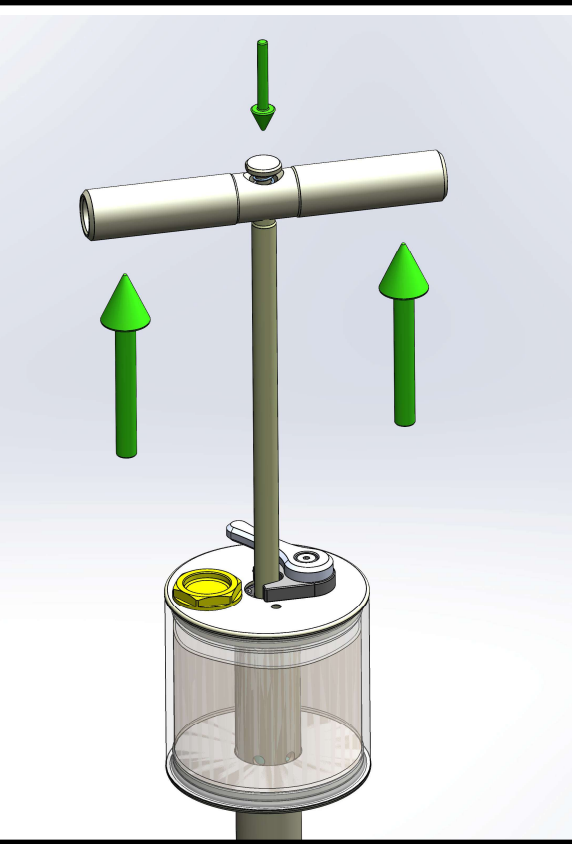

A.2 Compress oil in the shock

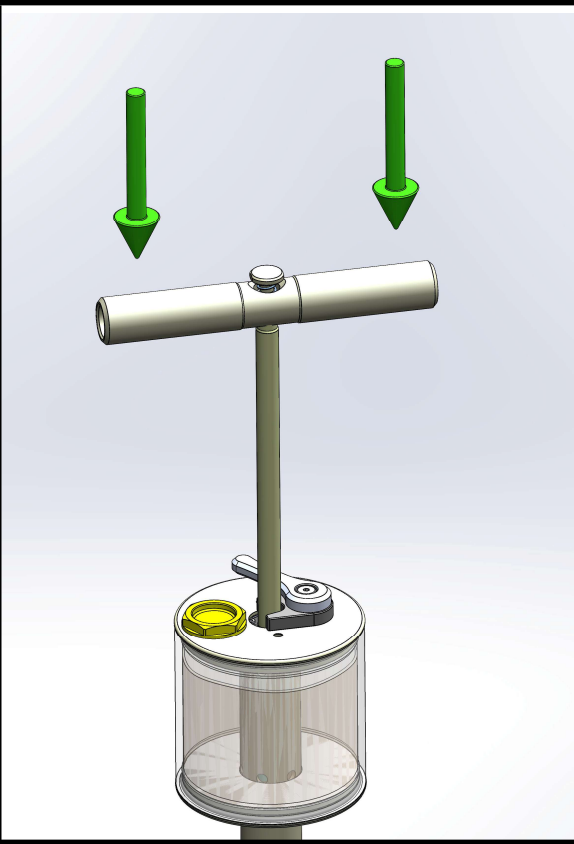

A.3 Lock the shaft to keep pressure

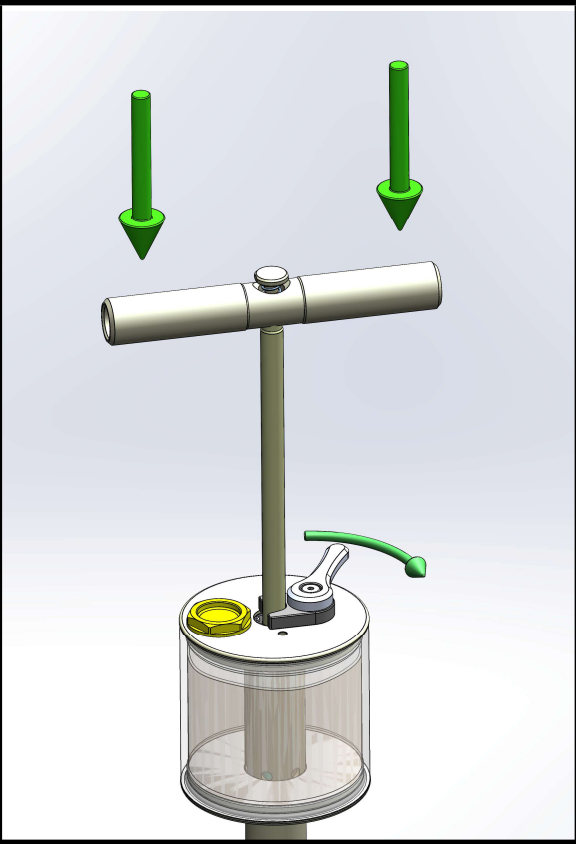


! Attention remarks!


- a) Fill reservoir and keep filling plug 3 turns open
- b) Start pushing in oil (step 1) when shock is empty
- c) Repeat "step 1" 4-8 times to get a partial filling
- d) After partial filling do vacuum cycle
- e) Repeat 3x vacuum cycle 3x Compression cycle
- f) While lever is locked in compression or vacuum do following to get trapped air out:
 - * Move shaft in and out
 - * Move reservoir piston up and down
 - * Open adjusters for bleeding open circuit
 - * Closed adjuster to bleed "HS" circuit
- g) Do all slowly to avoid foaming of the oil
- h) Only have your suspension serviced by qualified and experienced personel
- i) Make sure the reservoir is always filled with oil

B. VACUUM Shock (when it is at least partially filled)


B.1 Lower Lever with button pushed, so oil can flow through

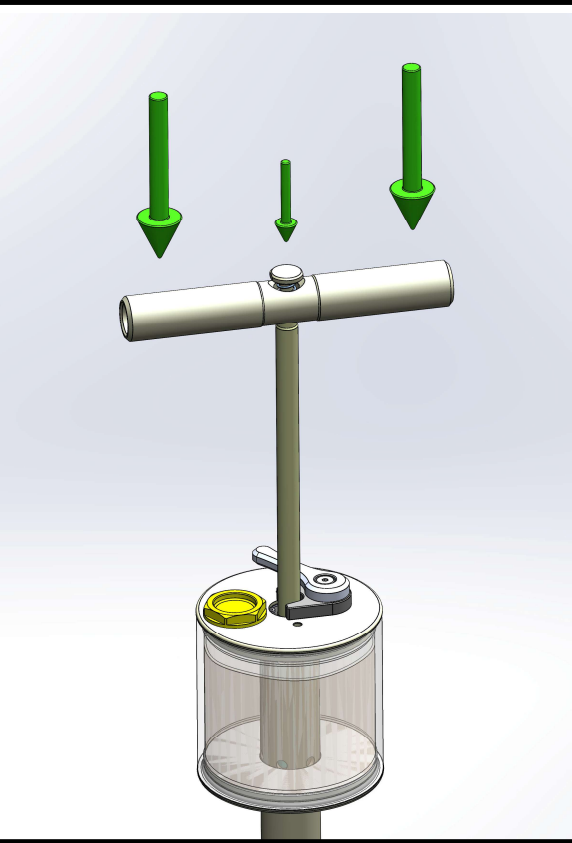

B.2 Vacuum oil by pulling lever, button closed

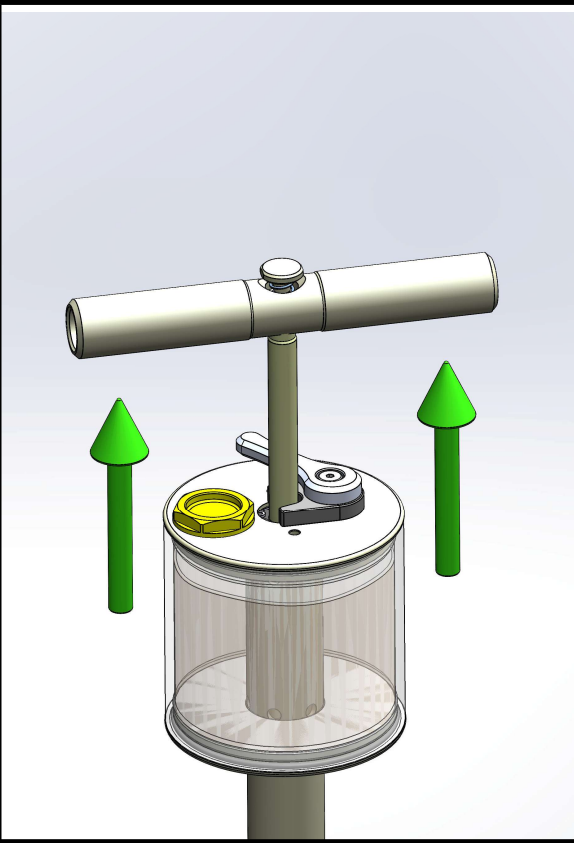

B.3 Lock the shaft to keep vacuum

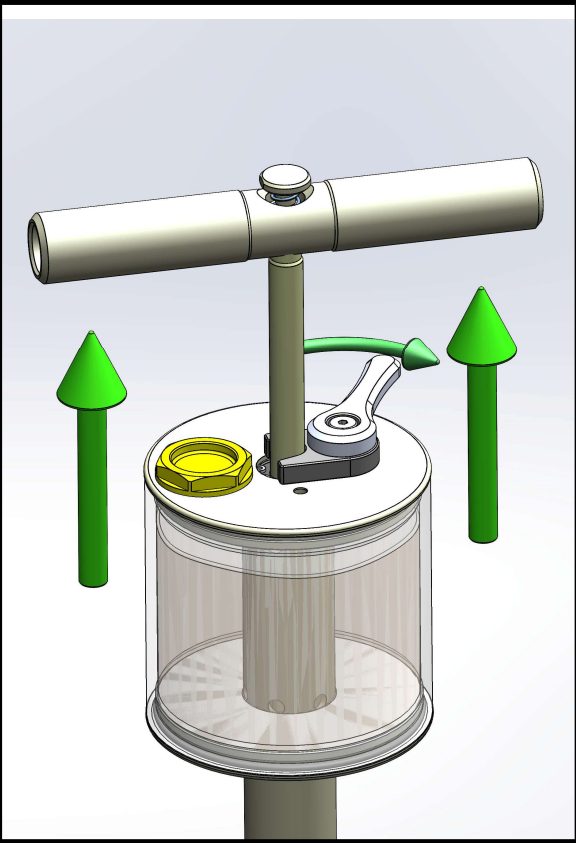

Specs:

- * Oil volume 400ml
- * Compression pressure 2bar @ 10kg force
- * Vacuum -980mbar @- 5kg force

Available from

<https://www.suspact.com/shop/suspact/shock-bleeder/>